




# CC100

Performance and efficiency

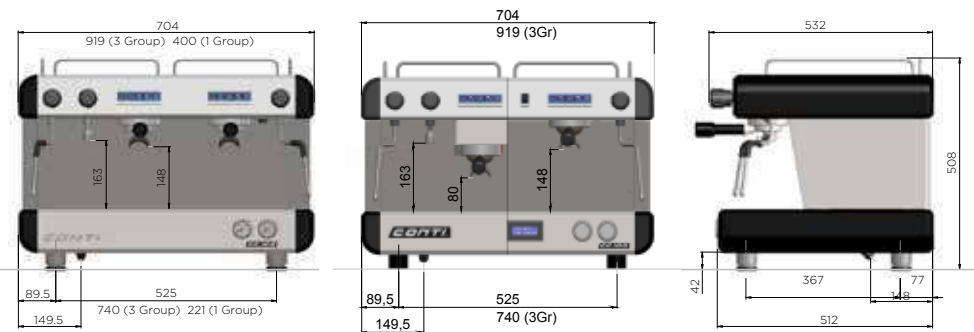

	1 Group	2 Group	3 Group
Height (mm)	500	500	500
Width (mm)	410	704	919
Depth (mm)	512	512	512
Weight (kg)	40	58	72
Boiler size (Litres)	5	11	18
Element size (W)	2500	2850/3600	4700
Total wattage (W)	2700	3050/3800	5000
Optional wattage (W)			6300 (6000 element)

CC100



# CC100

Performance and efficiency



Performance and efficiency

01763 249 398  
conti-espresso.co.uk  
info@conti-espresso.co.uk

Unit 7 The Quadrant  
Newark Close  
Royston  
Hertfordshire  
SG8 5HL

**CONTI**  
ESPRESSO MACHINE



**CONTI**  
ESPRESSO MACHINE





The CC100 series features exceptional build quality, consistent espresso extraction, compact size and incredible value for money.

Available in numerous colours and configurations from small and compact 1 group through to a 3 group for higher volume location.

Simplicity and flexibility equals incredible performance.



All colours are available in 1, 2 and 3 groups



**Espresso or tall cup machine**

Available – no extra cost for tall cup.

**Multiple configurations**

1 Group, 2 Group Compact, 2 Group or 3 Group.

**Attractive design**

Full stainless steel construction, including optional colour side panels in red, white or black.

**PID temperature control**

This allows the user to adjust water temperature to perfectly complement their coffee.

**Great temperature stability**

Through Thermal Siphon system – utilises fresh water for each shot.

**Optional display**

Feature to assist in fault diagnosis, service and filter change intervals.

**Pre-infusion**

One espresso and double espresso buttons – this ensures consistent extraction and helps ‘smooth out’ poor tamping.

**Auto GRP cleaning**

Function to ensure perfect performance.

**Cleaning kit**

Included with every machine.

**Eco mode**

Drops boiler temp to 60°C at the touch of two buttons – perfect for overnight or during quiet/ closed periods.

**Pod and capsule**

Adaptors available.

**Large cup warmer tray**


Saves space on counter top.

**Dual pressure gauges**

One to measure mains and pump pressure, one for boiler pressure.

**Choice of element rating**

2 Group - 2850w (13amp or 3600w (20amp) and 4700W(30amp)



**PID**

Boiler temperature controlled via PID, which not only maintains fantastic thermal stability for consistent espresso taste but also allows temperature to be adjusted easily to perfectly match the coffee profile/ type.



**Pre Infusion**

Pre-Infusion setting to increase extraction consistency and help iron out user error during the dosing and tamping stage.




**Eco Mode**

Drops the boiler temperature to 60°C when not in use, reducing power consumption and saving money – with the added bonus of reaching working temperature faster, for service.




**Auto Clean**

Cleaning cycle – ensures machine is kept clean for optimum - tasting drinks and increased intervals between servicing.



**Tall Cup**

Option available at no extra cost on all models – making serving a larger take away cup or tall glass simple and efficient



**Compact**

Our latest configuration features a perfectly compact design with 2 Groups, 2 steam arms, a 7 litre boiler plus PID – this is a real bench mark machine and a great solution for many outlets.